


RK 100 LS - 270 m³/h

TECHNICAL DATASHEET

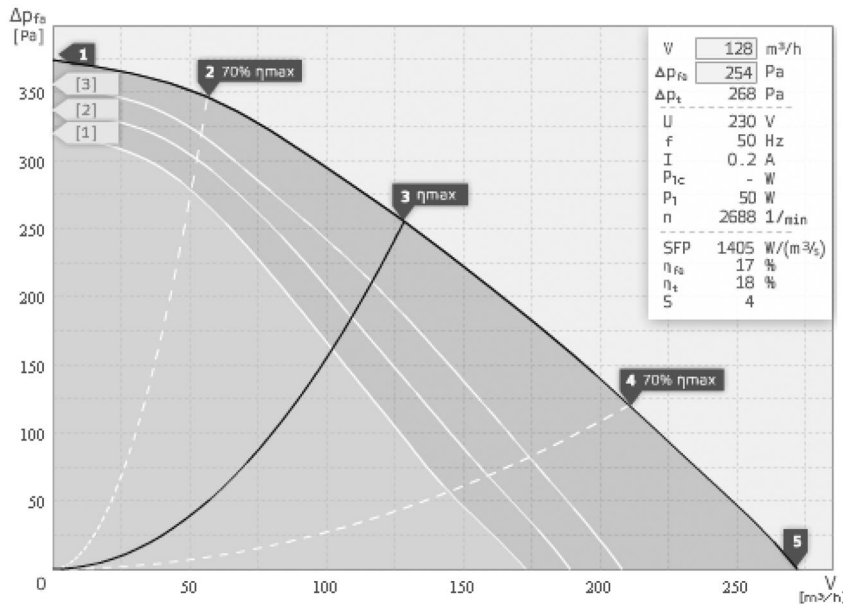

- Backward curved centrifugal fan
- Plastic housing PA6, RAL 7035
- Switch with 4-speed
- Speed controllable
- Integrated thermal switch

Operating Point		1	2	3	4	5
Current I	A	0,2	0,2	0,2	0,2	0,2
Power Consumption P1	W	42	44	50	55	56
RPM n	1/min	2815	2789	2689	2599	2578
SPL inlet LWA5	dB(A)	-	-	-	-	-
SPL outlet LWA6	dB(A)	-	-	-	-	-
SPL casing break out LWA2	dB(A)	-	-	-	-	-

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	-	-	-	-	-	-	-	-	-
Outlet	LWA6	-	-	-	-	-	-	-	-	-
Casing	LWA2	-	-	-	-	-	-	-	-	-

RK 100 LS 106706	
Voltage UN	230 V 1~
Current Imax	0,3
Ambient Temperature tA	70 °C
Medium Temperature tM	70 °C
Speed Control	4-3-2-1
Motor Protection	TAI
Isolation Class	B
Weight	2,5 kg

