


RS 200

TECHNICAL DATASHEET

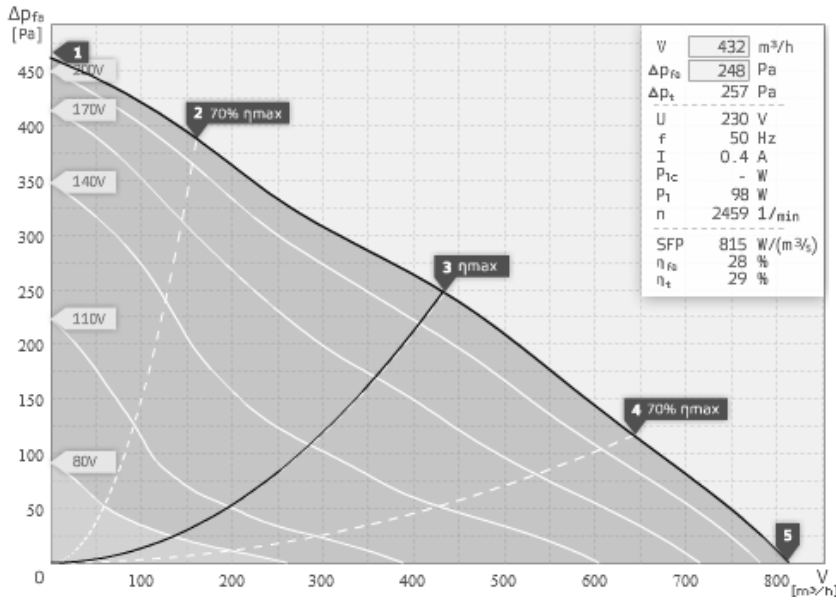

- Backward curved centrifugal fan
- Metal housing RAL 7035
- Speed controllable
- Integrated thermal switch
- Incl. terminal box

Operating Point		1	2	3	4	5
Current I	A	0,4	0,4	0,4	0,4	0,4
Power Consumption P1	W	74	83	98	97	89
RPM n	1/min	2723	2627	2460	2473	2567
SPL inlet LWA5	dB(A)	71	71	71	71	73
SPL outlet LWA6	dB(A)	70	71	70	71	73
SPL casing break out LWA2	dB(A)	-	-	-	-	-

Sound power (LW) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	70	35	53	61	65	66	63	58	47
Outlet	LWA6	70	35	56	63	62	65	64	59	47
Casing	LWA2	-	-	-	-	-	-	-	-	-

RS 200 104209	
Voltage UN	230 V 1~
Current Imax	0,5
Ambient Temperature tA	70 °C
Medium Temperature tM	70 °C
Speed Control	V
Motor Protection	TAI
Isolation Class	F
Weight	4,2 kg

