


DIGI-LUMEN

CONTROLLER

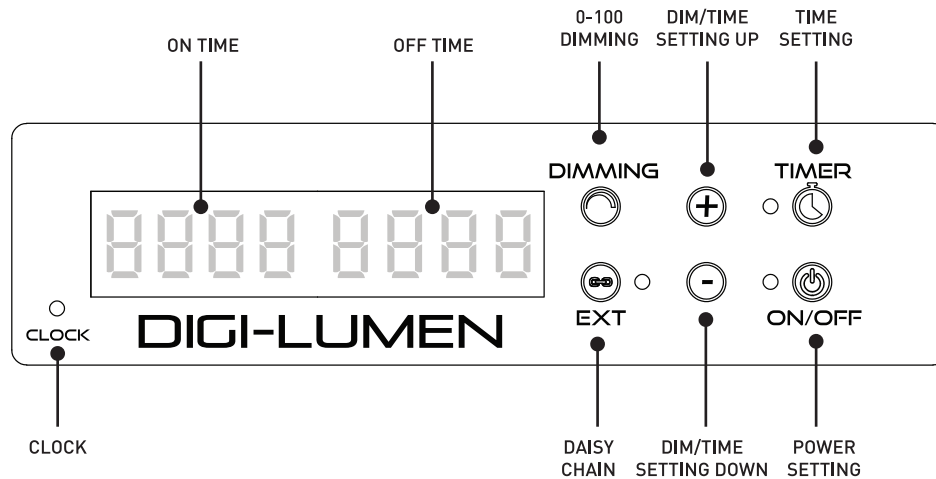

CONTROLLER QUICK START GUIDE

STEP 1: POWER ON

Press and hold the ON/OFF button. The indicator lamp turns green when the power is on.

STEP 2: SET LOCAL TIME

1. Press the RESET button once.
2. Use the controls to set the current time.
3. Wait 3–5 seconds for the time to lock in.

STEP 3: SET TIMER (ON/OFF TIMES)

1. Use the + and – buttons to set your schedule:
Left side = ON time. Right side = OFF time
2. Wait 3–5 seconds for the display to stop flashing.
3. Press and hold the TIMER button for 3 seconds.
The green indicator light confirms activation.

STEP 4: DIMMING

1. Press the DIMMING button.
2. Adjust brightness using the + and – buttons (10%–100%). Wait 3–5 seconds for confirmation.

STEP 5: DAISY CHAIN MODE

To link multiple lights:

- Press the EXT button. The green lamp means Daisy Chain Mode is active.

STEP 6: FULL MASTER RESET

To reset all settings:

- Press and hold the RESET button for 3–5 seconds.

FEATURES

- Connect up to 50 fixtures
- Dimming Range: 10%–100%
- Max Current: 80 A
- Dimming Voltage: 0–10 V
- Dual RJ12 Network Ports
- IP Rating: IP20

DIGI-LUMEN